



ME40K Solid Rubber Boot Quick Start Guide

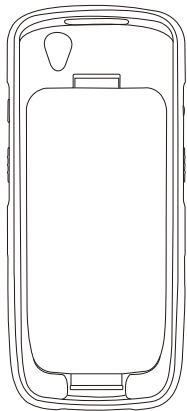

Overview





Front



Back


Installation Instructions

Insert the bottom of the ME40K into the rubber cover, ensuring a secure fit. Gently press down on the top of the device, gradually inserting it into the protective rubber cover. Continue pressing until the ME40K is fully inserted into the protective rubber cover and the installation is complete.



Disassembly Instructions

Firmly press down on the top corner of the rubber cover, allowing one corner of the ME40K to be exposed. Once the corner is visible, repeat the process on the opposite corner of the protective rubber cover. As you press on the opposite corner, gently lift and remove the device from the rubber cover.

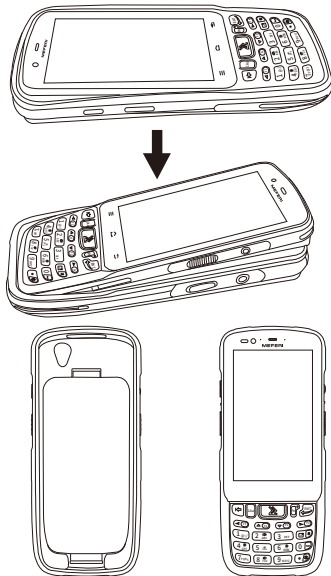

Wearable strap installation

After installing the protective rubber cover on ME40K find the bottom hole for the wearable strap on the protective case and thread the wearable strap through it, bringing it up through the top hole as well. Once the strap is through the top hole, insert it into the wearable strap buckle. Adjust the strap to a comfortable and suitable position and insert any excess strap into the strap buckle.

